

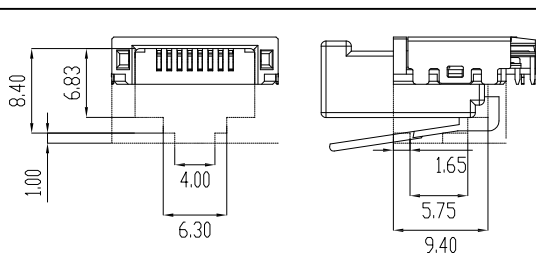


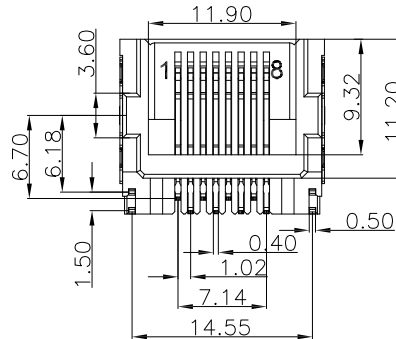

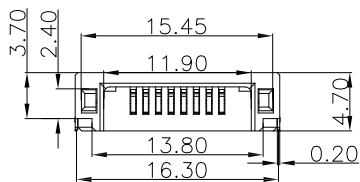



ROHS ENVIRONMENTAL PROTECTION

REV.	DESCRIPTION	ECN NO.	APPD.
R1	NEW RELEASE		



CONN.W/OPENING BASE W/PLUG DRAWING

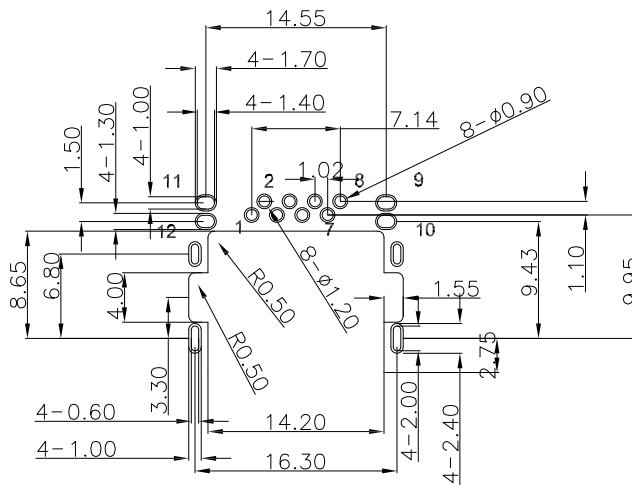

RECOMMENDED PCB LAYOUT (component side)(TOP VIEW)

SPECIFICATION:  
 JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS: PART 68 SUBPART F.

- ELECTRICAL:
1. Voltage: 125V AC RMS
  2. Current Rating: 1.5Amp.
  3. Contact Resistance: 40 Milliohms Max.
  4. Insulation Resistance: 500 Megohms Min. @500 Vdc.
  5. Dielectric Withstand Voltage: 1000V AC Rms 60Hz, 1Min.

- MECHANICAL:
1. Durability: 750 cycles Min.

- ENVIRONMENTAL:
1. Storage: -40°C to +85°C.
  2. Operation: : -20°C to +75°C.
  3. IR Reflow Soldering Temperature:: 255°C to 265°C(5-10 Seconds).
  4. Lead-free process,compliant RoHS.

RJ 1 1 D 2 2 J 1 3 L X - X X

LED Options	
L1:	L: GRE ; R: YEL
L2:	L: YEL ; R: GRE
L3:	L: AMB ; R: GRE
L4:	L: GRE ; R: GRE
L5:	L: WHT ; R: AMB

Packing
T: Tray
R: Tape & Reel

Gold Plating	
0:	Fu"
1:	1u"
2:	3u"
3:	6u"
4:	15u"
5:	30u"
6:	50u"

NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR
c	SHIELDING	1	BRASS T=0.2mm	Ni PLATING
b	TERMINAL	8	PHOSPHOR BRONZE	Au/Tin PLATING
a	HOUSING	1	PA9T UL94V-0	BLACK

QUALITY SYMBOLS		TOLERANCE UNLESS OTHERWISE SPECIFIED:	
■:	CRITICAL	DECIMALS:	ANGLES:
☒:	MAJOR	X: ±0.5	X: ±2°
▽:	ZERO DEFECT	X.X: ±0.3	X.X: ±1°
☒:	S.P.C	X.XX: ±0.2	

UNIT: mm	Size: A3
SCALE: NTS	

Yee YEESHINE TECHNOLOGY DONGGUAN CHINA

APPROVED	CHECKED	DRAWN	PART NO.	RJ11D22J13LX-XX
21MAR2017	21MAR2017	21MAR2017	DESCRIPTION	RJ45 Mid Mount, THT, 8P8C, PH3.70mm With LED
K.L.	Jack Liu	Jack Liu	CUSTOMER COPY	SHEET 1 OF 1 DRAWING NO. YEE170032 REV R1